


AGREE Test Chamber


(Temperature, humidity, vibration)



Energy Conservation

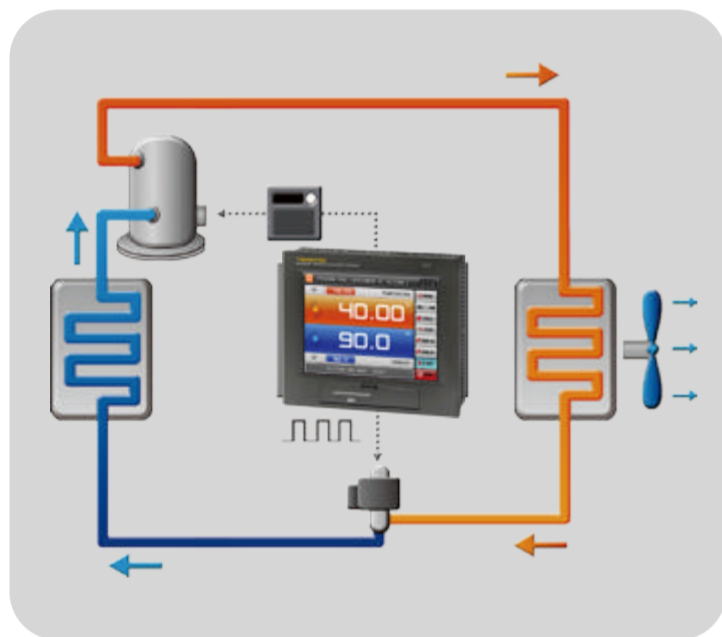

Remote network system

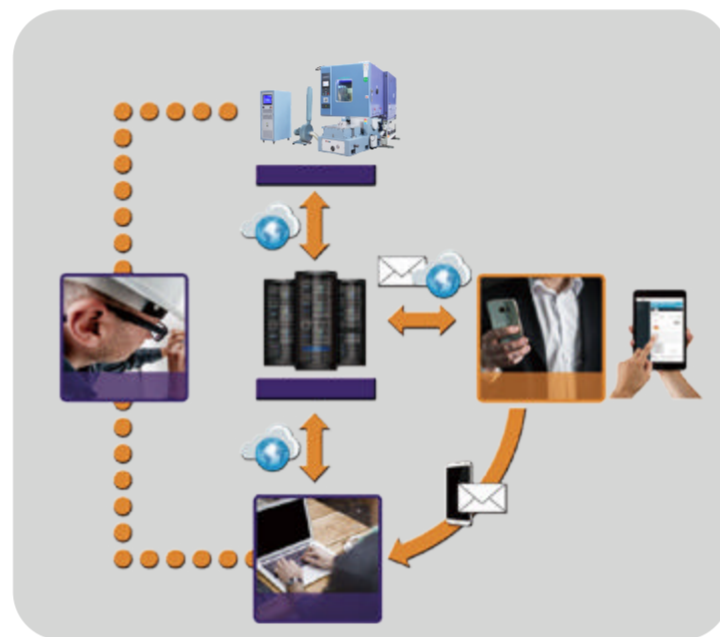

Circuit System



• Specifications

Model	SM-MVH-500-CC	SM-MVH-1000-CC	SM-MVH-1700-CC	SM-MVH-3400-CC	
Temperature	Temperature control range	-70°C~180°C (A:0°C~180°C;B: -20°C~180°C; C: -40°C~180°C; D:-70°C~180°C)			
	Temperature fluctuation	±0.5°C			
	Cooling rate	180.0°C~25.0°C Cooling rate 2.0~3.0°C/min 25.0°C~-40.0°C Cooling rate 1.0~2.0°C/min -40.0°C~-70.0°C Cooling rate 0.7~1.5°C/min			
	Heating rate	-70.0°C~180.0°C Within 60 mins 3.0~5.0°C/min			
	Temperature uniformity	±1.5°C (-40.0°C~100.0°C) ±2.0°C (100.1°C~180.0°C or -40.0°C~-70.0°C)			
Humidity	Humidity control range	20.0%RH~98.0%RH			
	Humidity fluctuation	±1.0% RH			
	Humidity uniformity	±2.0%RH			
Material / components	Internal material	Stainless steel(SUS304)			
	External material	Cold rolled steel sheet / powder spraying			
	Heat insulating material	100mm thickness polyurethane plate+10mm thickness mineral wool			
	Fan	Centrifugal blower			
	Compressor	France Tecumseh, Germany Bock, Germany Bitzer			
	Condenser	Air cooled,Water cooled			
	Refrigerant	R404A、R23、R508			
	Evaporator	Fin - and - Tube Heat Exchanger			
Size	Inner size(mm) W*H*D	800*800*800	1000*1000*1000	1200*1200*1200	1500*1500*1500
	Volume (L)	500L	1000L	1700L	3400L
Operating ambient temperature	+5 ~ 35°C				
Power supply	380V AC 50/60Hz				
Controller	South Korea TEMI-2700				

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc



Mobile phone scan
can visit our official website