



# HAST ACCELERATED AGING CHAMBER



Energy Conservation

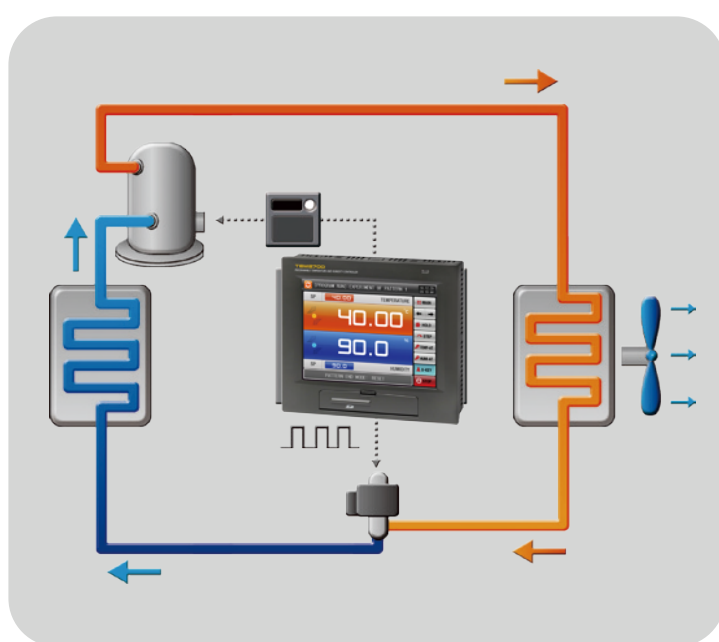

Remote network system

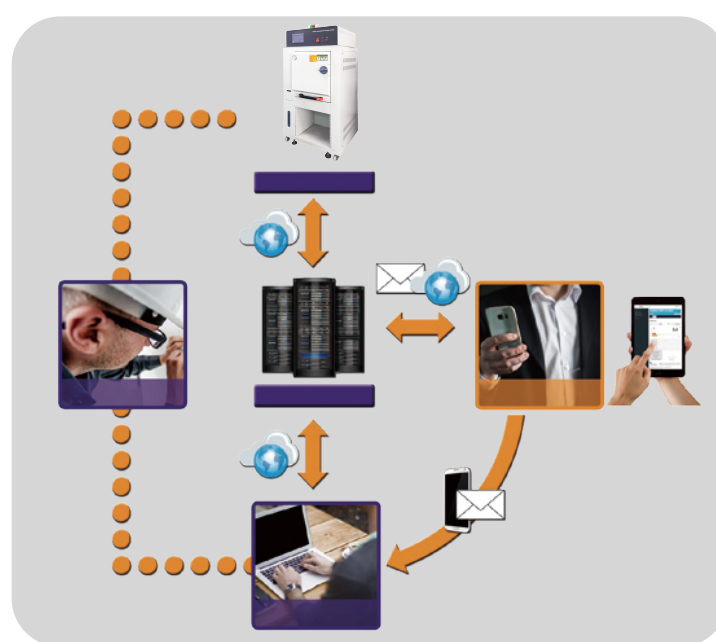

Circuit System



Model		SM-PCT-250-A	SM-PCT-300-A	SM-PCT-400-A
Temperature	Temperature control range	105.0°C~155.0°C ( A:132°C;B:142.9°C; C:155°C;)		
	Pressure control range	normal pressure +0.2~2.0kg/cm2、 normal pressure +0.2~3.0kg/cm2、 normal pressure +0.2~3.5kg/cm2		
	Temperature fluctuation	±2.0°C		
	Temperature uniformity	±3.0°C		
Humidity	Humidity control range	65.0%RH~100.0%RH		
	Humidity fluctuation	±2.0% RH		
	Humidity uniformity	±5.0%RH		
Material / components	Internal material	Stainless steel(SUS316)		
	External material	Stainless steel(SUS304)		
	Heat insulating material	100mm thickness mineral w ool		
	Fan	Impeller Fan		
	Compressor	France Tecumseh		
	Condenser	Air cooling, w ater cooling		
	Refrigerant	R404A		
	Evaporator	Air-cooled plate fin cooler		
Size	Heater	Nickel chromium alloy heating w ire		
	Inner size(mm)	Φ250*450(D)	Φ300*450(D)	Φ400*500(D)
	Outer size(mm)W×D×H	560*1050*1250	660*1050*1250	760*1150*1350
Operating ambient temperature		+5 ~ 35°C		
Controller		SANWOOD SH-5500		

**Sanwood (HK) Industrial Corporation.,limited**  
**Guangdong Sanwood Technology Corporation.,limited**

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong  
TEL: +86+769-81182799  
FAX: +86+769-82987199  
E-mail: info@sanwood.cc  
www.sanwood.cc



Mobile phone scan  
can visit our official website