



Rain Test Chamber (IPX3/4)



Mobile phone scan
More product information

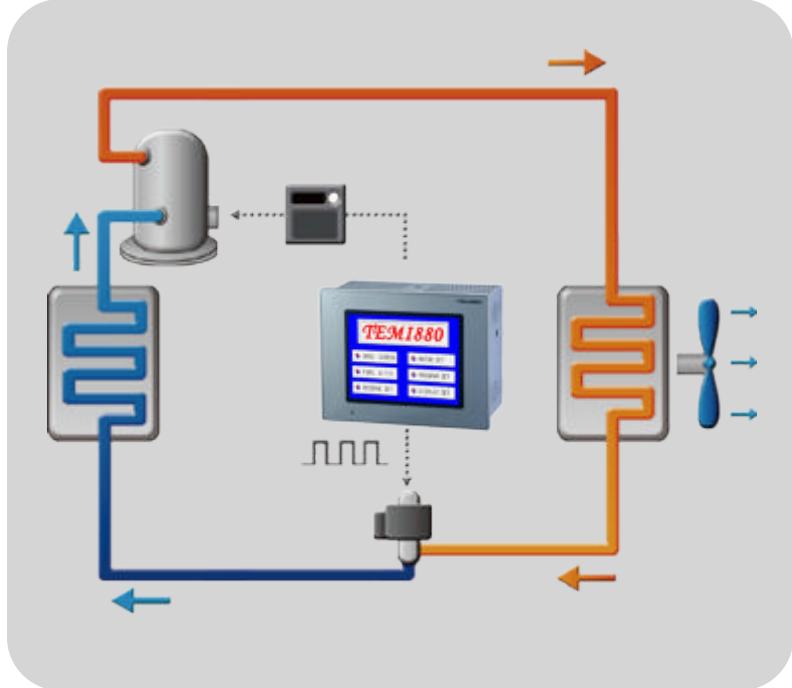

Energy Conservation

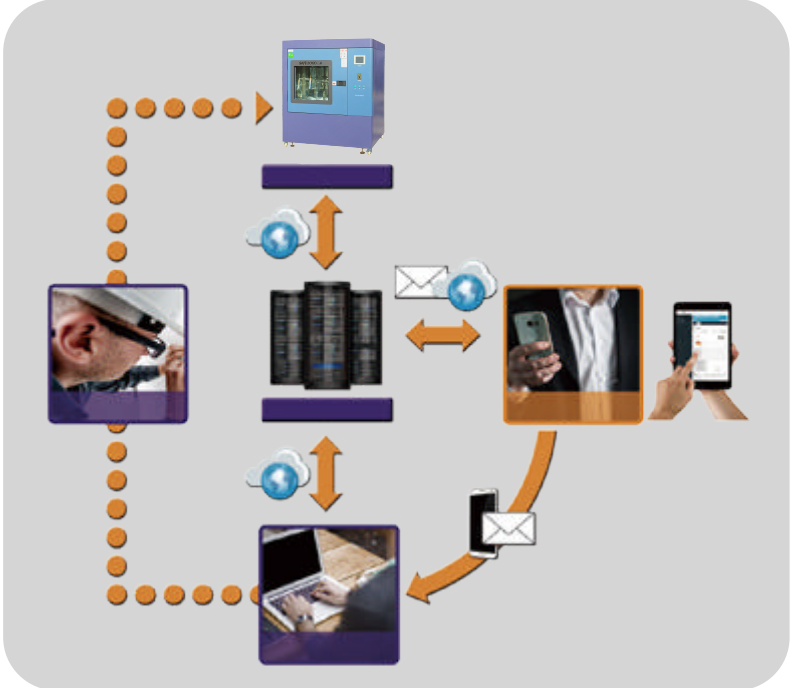

Remote network system



Circuit System

International standard



● Specifications

Model		SM-IPX34-1000	SM-IPX34-1500
Testing room size		1000(W)*1000(H)*1000(D)	1400(W)*1100(H)*1000(D)
External size		1450(W)*1800(H)*1200(D)	1850(W)*1900(H)*1200(D)
Power		2.5(KW)	2.5(KW)
Performance index	Radius of Water spraying ring	400mm	600mm
	Water pipe diameter	φ18mm	
	Nozzle hole diameter	SANWOOD® Environmental Test Chambers	φ0.4mm
	Aperture spacing	50mm	
	Swing amplitude	±45°、±60°、±90°、±180°（theoretical value）	
	Rotating speed	1r/min can also be used for speed regulation without joints	
Operation Control System	Controller	SANWOOD SH-5500 controller	
	Time controller	Imported programmable time computer integrated controller	
	Water pressure control	Electromagnetic flowmeter	
	Observation	Large area visualization toughened glass door	
	Water supply system	Water tank, booster pump	
	Power supply	AC380V TN-S	
Safety protection		Leakage, short circuit, motor overheating	

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

 ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong

 TEL: +86+769-81182799

 FAX: +86+769-82987199

 E-mail: info@sanwood.cc

 www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website