



# 2 Zone Thermal Shock Test Chamber



### Energy Conservation

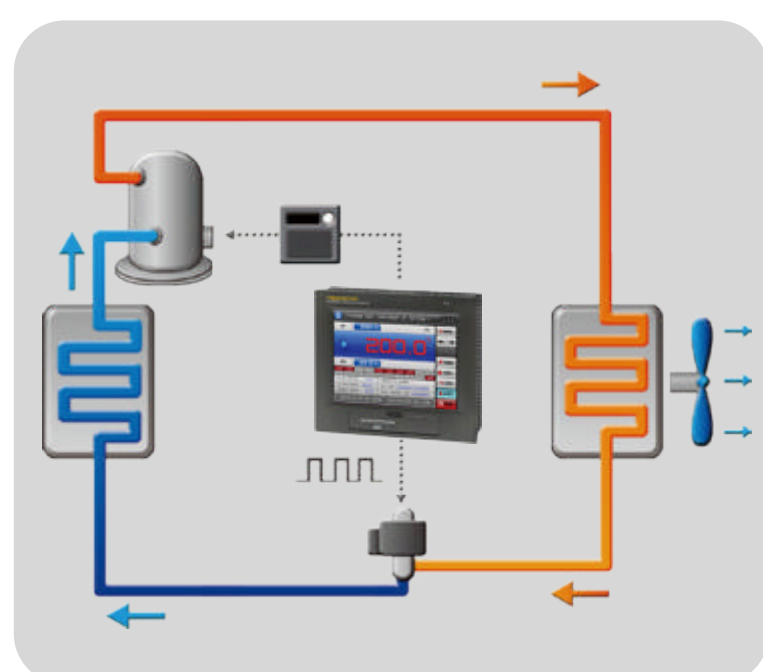

### Remote network system

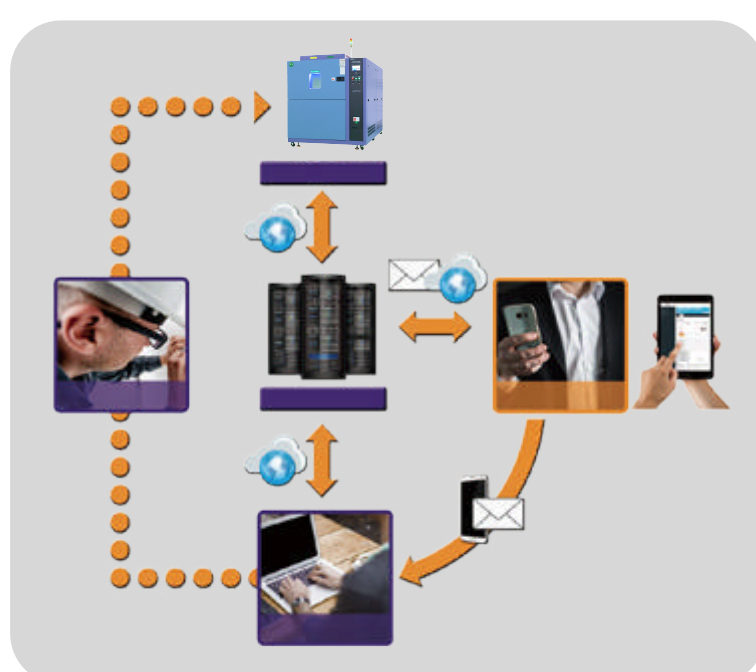

### Circuit System



High Temperature Zone



Low Temperature Zone

● Specifications

Model	SM-50-2P-A	SM-80-2P-A	SM-150-2P-A	SM-200-2P-A	SM-300-2P-A	SM-500-2P-A	
Temperature	Temperature impact range	-55℃~150℃ (A:-40℃~150℃;B:-55℃~150℃; )					
	Temperature fluctuation	±1.0℃					
	Low temperature precooling time	25.0℃~-70.0℃ Within 60 mins 1.0~3.0℃/min					
	High temperature preheating time	25.0℃~200.0℃ Within 45 mins 3.0~7.0℃/min					
	Temperature conversion time	3s					
	Temperature recovery time	Within 5 mins		Within 10 mins			
Material / components	Internal material	Stainless steel(SUS304)					
	External material	Cold rolled steel sheet / powder spraying					
	Heat insulating material	100mm thickness polyurethane plate+10mm thickness mineral wool					
	Fan	Centrifugal blower					
	Compressor	fully closed or semi-closed	semi-closed				
	Condenser	Air cooling, water cooling					
	Refrigerant	R404A、R23、R508					
Size	Evaporator	Fin - and - Tube Heat Exchanger					
	Heater	Nickel chromium alloy heating wire					
	Interior size(mm) W*H*D	350*400*350	400*500*400	500*600*500	650*460*670	960*460*670	960*650*800
	Outer size(mm) W*H*D	1100*1930*1460	1150*2130*1550	1250*2530*1650	1400*2250*1850	1750*2250*1850	1750*2630*1980
	Volume (L)	50L	80L	150L	200L	300L	500L
Operating ambient temperature		+5 ~ 35℃					
Power supply		380V AC 50/60Hz					
Controller		SANWOOD SH5600:Equipped with RS232, RS485 port; (7.0 inch controller) USB data export					

**Sanwood (HK) Industrial Corporation.,limited**  
**Guangdong Sanwood Technology Corporation.,limited**

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong  
TEL: +86+769-81182799  
FAX: +86+769-82987199  
E-mail: info@sanwood.cc  
www.sanwood.cc  
www.climatic-chambers.com



Mobile phone scan  
can visit our official website